
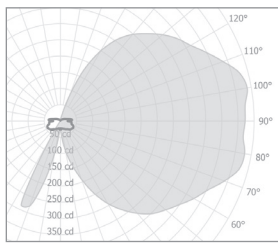
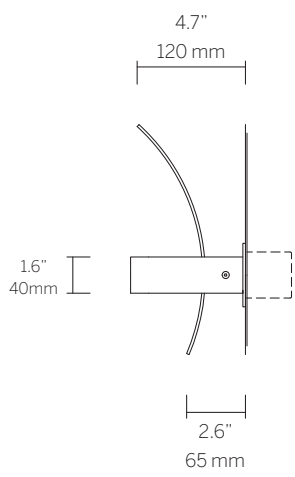
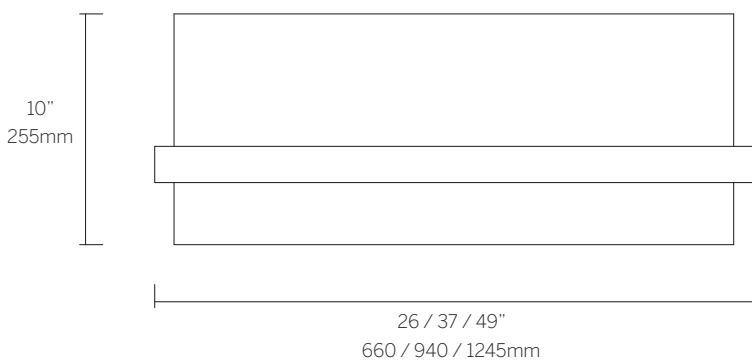
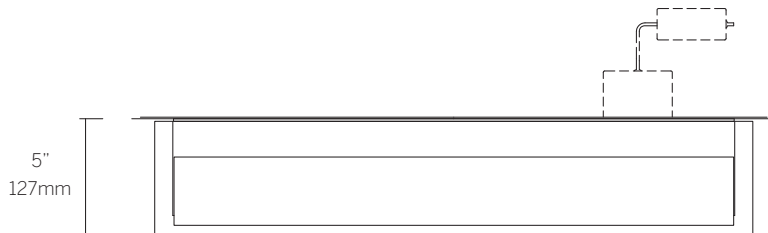


Wing

Wing provides glare-free indirect illumination when mounted horizontally. It is perfect for stairways and corridors with open ceilings.

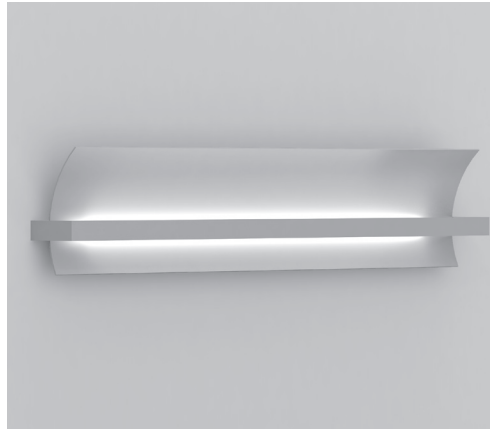

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Reflector is painted white - RAL 9010, 30% Gloss.

For up to date technical information, refer to almlighting.com

Model 1820

1820

Type

W Wall

W

Size

26 26"
37 37"
49 49"
Custom

Wattage¹

26"
L 6W (800lm)
M 12W (1486lm)
H 20W (2348lm)
37"
L 9W (1133lm)
M 17W (2106lm)
H 28W (3326lm)
49"
L 12W (1533lm)
M 23W (2848lm)
H 38W (4500lm)

Color Temp²

827 2700
830 3000
835 3500
840 4000

Voltage

U 120/277
I 120VAC only

Control (Remote 24V)

S Non-dim
D010 0-10V 10%
DFPN Lutron Forward Phase 1% 120VAC
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Lutron Hi-lume Premier 0.1% EcoSystem

Diffuser

SW Satin opal acrylic

SW

Finish³

19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
22 Painted custom color



almlighting.com